

Masterflow[®]524 (formerly known as Standard Bedding Grout)

High strength, non shrink cementitious construction grout

Description

Masterflow[®]524 is a ready to use product in powder form, which requires only the on-site addition of water to produce a non shrink grout of predictable performance.

Applications

Masterflow[®]524 is formulated for use at plastic or pourable consistency, and may be used with confidence for bedding, grouting and void filling operations.

Advantages

- Non shrink.
- Adjustable consistency.
- Proven and predictable performance.
- High bond strength to steel and concrete.
- Early strength development even at flowable consistency.
- Impermeable.

Packaging


Masterflow[®]524 is supplied in 25kg bags.

Typical properties

Water addition	Pourable	3.75 ltrs / 25 kg
	Plastic	3.40 ltrs / 25 kg
Density	Pourable	2230 kg / m ³
	Plastic	2350 kg / m ³
Free expansion:		2 - 4 %
Restrained expansion:		0 - 0.4 %

Compressive Strength N/mm ² ASTM C-109:	Pourable
1 day	39.00
3 day	43.00
28 day	58.00
Flexural Strength N/mm ² BS 6319 Part 3:	Pourable
28 day	6.95
Tensile Strength N/mm ² BS 6319 Part 7:	Pourable
28 day	4.04
Water penetration DIN 1048 Part 5:	Nil

Typical applications

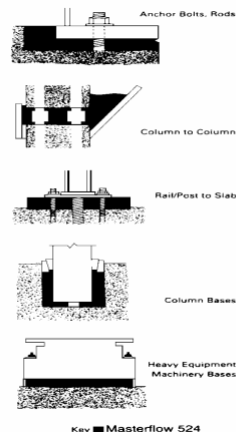

Application procedure

Preparation

The surface onto which the grout is to be applied should be scabbled to remove laitance and expose aggregate. Do not use bush hammers or similar preparation equipment that can crush the aggregate but leave it in place. The surface must be free of oil, dust, dirt, paint, curing compounds or other contaminants that could impair adhesion. Soak area to be grouted to minimize absorption. Surfaces should be damp but free of standing water. Particular attention should be paid to bolt holes to ensure that these are water-free. Use oil free compressed air to blow out bolt holes and pockets as necessary.



The Chemical Company

Masterflow[®] 524 (formerly known as Standard Bedding Grout)

Base plates, bolts, etc. must be clean and free of oil, grease and paint. Set and align equipment. If shims are to be removed after the grout has set, then lightly grease them for easy removal. Ensure formwork is secure and watertight to prevent movement and leaking during the placing and curing of the grout.

Mixing

Damp down the inside of the grout mixer with water prior to mixing the initial batch of Masterflow[®]524. Ensure the mixer is damp but free of standing water. Add the pre-measured quantity of water. Slowly add the Masterflow[®]524, mixing continuously. Mix for 3-5 minutes until a smooth, uniform, lump free consistency is achieved.

Placing

Place immediately after mixing, into the prepared area in such a manner that the grout has the shortest distance to flow. Pour the grout continuously maintaining a constant hydrostatic head wherever possible.

Masterflow[®] grouts are suitable for use with most types of pumping equipment.

Immediately after Masterflow[®]524 grout is placed, cover all exposed grout with clean wet hessian and keep moist until grout surface is ready to be finished, or until final set. Alternatively, consider the use of a curing membrane from the Masterkure[®] range.

Precautions

The temperature of both the grout and elements coming into contact with the grout should be in the range of +5°C to +35°C. Do not use water in an amount or at a temperature that will produce a consistency more than pourable or cause mixed grout to bleed or segregate. Masterflow[®]524 should be laid at a minimum thickness of 25mm and to a maximum depth of 80mm. For applications above

80mm consider the use of Masterflow[®]980 T. For applications below 25mm consult BASF Construction Chemicals SA Technical Services Department for advice

DO NOT OVERWORK AND AVOID USING MECHANICAL VIBRATION.

UNDER NO CIRCUMSTANCES SHOULD MASTERFLOW[®]524 BE RETEMPERED BY THE LATER ADDITION OF WATER.

It is essential that a mechanically powered grout mixer is used to obtain the optimum properties. A slow speed drill and mixing paddle may be used for single bag batches only.

Yield / consumption

12.0ltr / 25kg bag at pourable consistency.
84 x 25kg bags / m³.

Note

For precision grouting of heavy machinery use Masterflow[®]928 T or in critical operating conditions Masterflow[®]885. When a very rapid set is required in areas subject to chemical spillage or contamination, use epoxy grouts Masterflow[®]400 / 410.

For additional information on Masterflow[®]524 grout or other non-shrink grouting materials, contact your BASF Construction Chemicals SA representative.

Storage

Store under cover, out of direct sunlight and protect from extremes of temperatures.

Failure to comply with the recommended storage conditions may result in premature deterioration of the product or packaging. For specific storage advice consult BASF Construction Chemicals SA's Technical Services Department.



The Chemical Company

Masterflow[®] 524 (formerly known as Standard Bedding Grout)

Safety precautions

As with all chemical products, care should be taken during use and storage to avoid contact with eyes, mouth, skin and foodstuffs (which can also be tainted with vapour until product fully cured or dried). Treat splashes to eyes and skin immediately. If accidentally ingested, seek immediate medical attention. Keep away from children and animals. Reseal containers after use.

Note

Field service, where provided, does not constitute supervisory responsibility. For additional information contact your local BASF Construction Chemicals SA representative. BASF Construction Chemicals SA reserves the right to have the true cause of any difficulty determined by accepted test methods.

Quality and care

All products originating from BASF Construction Chemicals' SA facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001:2000.

REQUEST AND REFER TO RECOMMENDED
INSTALLATION PROCEDURES FOR **MASTERFLOW**
GROUTS PRIOR TO USE

Whilst any information contained herein is true, accurate and represents our best knowledge and experience, no warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.

As all BASF's technical datasheets are updated on a regular basis it is the user's responsibility to obtain the most recent issue.

BASF Construction Chemicals South Africa (Pty) Ltd

P.O. Box 420, Westonaria, 1780
11 Pullinger Street, Westonaria, 1779
Tel: +27 11 754 1343
Fax: +27 11 754 1105

852 Sixteenth Road, Midrand
PO Box 2801, Halfway House, 1685
Tel: +27 11 203 2405

Website: basf-cc.co.za

